



DO NOT REMOVE CARD FROM AIRCRAFT Passenger Briefing Information

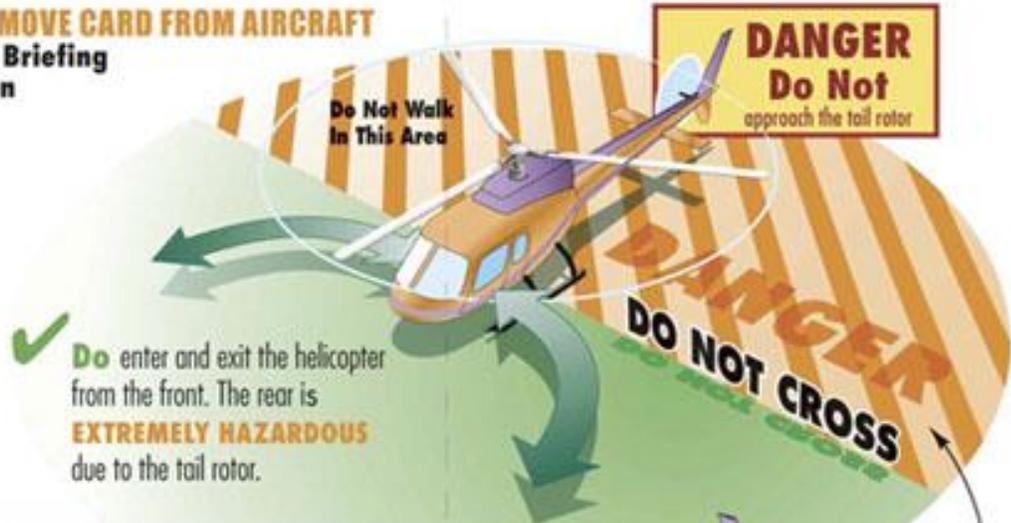

- DO NOT** walk upright under rotors!
- DO NOT** walk uphill under rotors
- DO** crouch when walking under rotors, hold on to hats and loose clothing.

What To Do in Case of an Emergency Landing in Water

- | GENERAL INSTRUCTIONS | LIFE VEST OPERATION |
|--|---|
| <ol style="list-style-type: none"> 1. Remain calm and follow instructions of the pilot. 2. After the aircraft has come to rest in water, remove your seatbelt and head set. 3. Put on your life vest, DO NOT INFLATE! 4. Upon pilots command, open or jettison doors. 5. Exit aircraft only after rotors have stopped turning. 6. Operate gas inflation handle on your life vest. | <ol style="list-style-type: none"> 1. Remove your seatbelt and headset 2. Remove life vest from waist pouch 3. Don your life vest by pulling over your head. DO NOT INFLATE! 4. Fasten buckles 5. Pull tight around waist. 6. Exit aircraft through emergency exit doors. 6. AFTER LEAVING AIRCRAFT, jerk gas release knobs. 7. If life vest becomes soft, it may be inflated manually. |

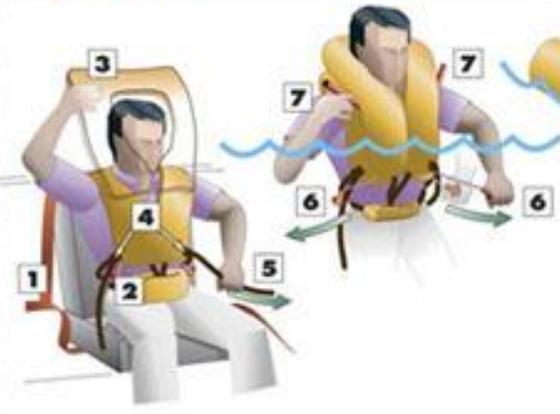

DANGER
Do Not approach the tail rotor

Do Not Walk In This Area

What To Do in Case of an Emergency Landing on Land


EXIT AIRCRAFT ACCORDING TO SEATING

Passengers in the **BACK SEATS** should exit the door behind the pilot

Passengers in the **FRONT SEAT** should exit the door opposite the pilot



NO SMOKING at any time

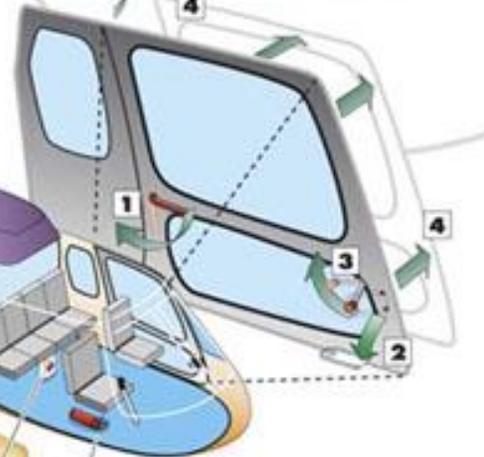

To Open Rear Left Doors:
Slide latches on top and bottom of doors out of latches into catch.


To Open Front Left and Right Doors:
Pull down handle and release, door will open by itself.

To Operate Emergency Door Jettison:

1. Remove plastic guard
2. Pull rod lever to the rear and then...
3. Push door away from helicopter

Seat Belt Operation

Seat belts are provided for your safety and must be worn at all times.

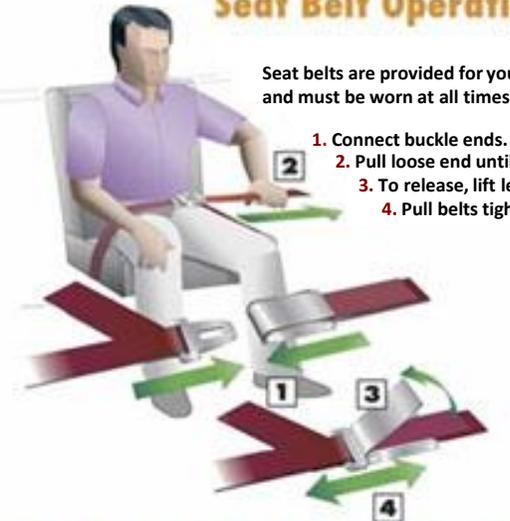


1. Connect buckle ends.
2. Pull loose end until tight.
3. To release, lift lever.
4. Pull belts tight.

Fire Extinguisher Operation

A portable fire extinguisher is carried in a bracket located on the right side of the pilots seat.

1. Remove from bracket
2. Hold extinguisher in the upright position
3. Remove safety pin
4. Point nozzle in direction of flames
5. Squeeze handle to discharge
6. Direct contents to base of flames.

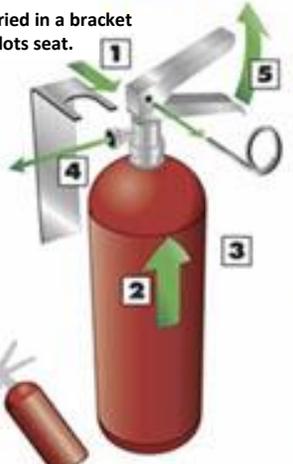

NO SMOKING at any time